

# TECHNICAL DATA

REVERSIBLE VIBRATORY PLATES

BPH 80/65 S



#### Maximum longevity

Full protection hood - engine and components protected all around



#### Safe operation

Radio/cable remote control or cable remote control




#### More transparency

Integrated diagnostic module with fault code display

**Shipping dimensions in m3**

**BPH 80/65 S**

0,702

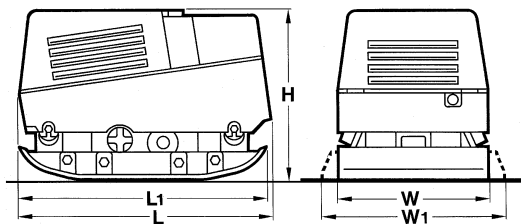

**Standard Equipment**

- Hydrostatic drive
- Combination remote control cable/radio
- Electric starter
- Engine protection hood
- Highly wear resistant base plate
- Automatic shutdown at low oil level
- Lockable engine cover and dash board
- Single point lifting device , foldable
- Battery disconnect switch
- Easy Service Concept
  - Diagnostic module with fault code display
  - Hour meter
  - foldable full protection hood
- 3-2-1 Warranty

**Optional Equipment**

- Special painting
- Mobile quick charger
- Service Kit
- Tool kit
- TOUGH WARRANTY

**Dimensions in mm**

	H	L	L1	W	W1
<b>BPH 80/65 S</b>	785	1118	1088	650	800

**Technical Data**

**Weights**

Operating weight CECE (W)	kg	707
Operating weight CECE (W1)	kg	750
Basic weight	kg	745

**Dimensions**

Basic working width	mm	800
Lowest passing height	mm	785

**Driving Characteristics**

Working speed, max.	m/min	28
Max. gradeability (dep. on soil con.)	%	30

**Drive**

Engine manufacturer	Hatz	
Type	1D 90 W	
Emission stage	Stage V	
Cooling	air	
Number of cylinders	1	
Performance ISO 3046	kW	10,9
Speed	min-1	3.000
Drive system	hydraulic	
Fuel	Diesel	
Fuel comsump. aver. during operation	l/h	2,5

**Exciter system**

Frequency	Hz	55
Amplitude	mm	1,80
Centrifugal force	kN	80

**Capacities**

Fuel	l	10,0
Hydraulic	l	25,0

Technical modifications reserved. Machines may be shown with options.

**BOMAG**

**BPH 80/65 S**



PRE 700 15 010

300120 Sa03

**BOMAG**  
 Hellerwald  
 D-56154 Boppard  
 P.O. Box 5162  
 Tel. (0)6742 - 1000  
 Fax (0)6742 - 3090

