

# TECHNICAL DATA

REVERSIBLE VIBRATORY PLATES

BPR 40/60 D



**Maximum longevity**

Full protection hood - engine and components protected all around



**Precise and save to operate**

BOMAG Comfortable control lever




**Safe transport**

Transport wheels (optional)

**Shipping dimensions in m3**

**BPR 40/60 D**

0,623

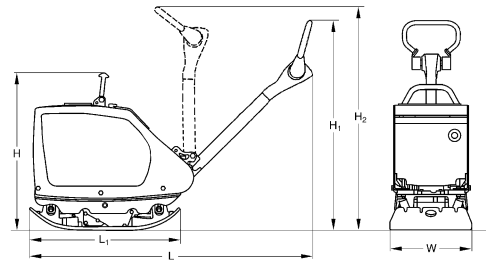

**Standard Equipment**

- Fully closed engine protection hood made of high-strength steel
- Comfortable control lever
- Height adjustable steering rod
- Low vibration steering rod
- Steering rod lockable in transport and working position
- Vibration and throttle regulation on the steering rod
- Highly wear-resistant, powder-coated base plate
- Fully protected V-belt
- Automatic decompression
- Recoil starter
- Hour meter (Electric starter)
- 3-2-1 Warranty

**Optional Equipment**

- Transport wheels (+5kg)
- Electric starter (+20kg)
- Tool kit
- Special painting
- Plastic mat
- Service Kit

**Dimensions in mm**

|                    | H   | H1  | H2   | L    | L1  | W   |
|--------------------|-----|-----|------|------|-----|-----|
| <b>BPR 40/60 D</b> | 688 | 820 | 1220 | 1510 | 762 | 600 |

**Technical Data**

**Weights**

|                           |    |     |
|---------------------------|----|-----|
| Operating weight CECE (W) | kg | 260 |
| Basic weight              | kg | 257 |

**Dimensions**

|   |    |       |
|---|----|-------|
| Basic working width                     | mm | 600   |
| Lowest passing height                   | mm | 688   |
| Min. height w. steering in top position | mm | 820   |
| Max. height w. steering in top position | mm | 1.120 |

**Driving Characteristics**

|                                       |       |    |
|---------------------------------------|-------|----|
| Working speed, max.                   | m/min | 27 |
| Max. gradeability (dep. on soil con.) | %     | 32 |

**Drive**

|                                      |         |       |
|--------------------------------------|---------|-------|
| Engine manufacturer                  | Hatz    |       |
| Type                                 | 1B20    |       |
| Emission stage                       | Stage V |       |
| Cooling                              | air     |       |
| Number of cylinders                  | 1       |       |
| Performance ISO 3046                 | kW      | 3,1   |
| Speed                                | min-1   | 3.000 |
| Drive system                         | mech.   |       |
| Fuel                                 | Diesel  |       |
| Fuel consump. aver. during operation | l/h     | 0,7   |

**Exciter system**

|                   |    |      |
|-------------------|----|------|
| Frequency         | Hz | 80   |
| Centrifugal force | kN | 40   |
| Amplitude         | mm | 1,40 |


**Capacities**

|      |   |     |
|------|---|-----|
| Fuel | l | 3,0 |
|------|---|-----|

Technical modifications reserved. Machines may be shown with options.

**BOMAG**

**BPR 40/60 D**



PRE 692 93 010

240523 Sa03

**BOMAG**  
 Hellerwald  
 D-56154 Boppard  
 P.O. Box 5162  
 Tel. (0)6742 - 1000  
 Fax (0)6742 - 3090

