

TECHNICAL DATA

SINGLE DIRECTION VIBRATORY PLATES

BPS 18/45



Compact and Comfortable

Handlebar vibration absorbing and foldable



Tough body

Protective frame keeps the machine safe from rough handling




Smooth transportation

Carrying handles (standard) and transport wheels (optional)

Shipping dimensions in m3

BPS 18/45

0,240

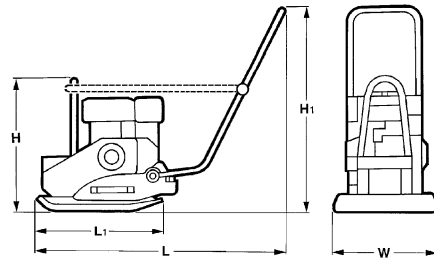

Standard Equipment

- Vibration insulated steering bow, foldable
- Engine protection frame
- Highly wear resistant base plate
- Automatic shutdown at low oil level
- Recoil starter
- Single point lifting device
- Fully protected V-belt
- Carrying handles

Dimensions in mm

	H	H1	L	L1	W
BPS 18/45	550	886	970	550	450

Optional Equipment

- Sprinkler system
- Transport wheels
- Tool kit
- Service Kit

Technical Data

**BOMAG
BPS 18/45**

Weights

Basic weight	kg	84
Operating weight CECE (W)	kg	86

Dimensions

Working width (W)	mm	450
-------------------------	----	-----

Driving Characteristics

Working speed, max.	m/min	25
Max. gradeability (dep. on soil con.)	%	30

Drive

Type		168 F-C
Emission stage		StageV/CARB P.3
Cooling		air
Number of cylinders		1
Performance SAE J 1349	kW	3,1
Speed	min-1	3.600
Drive system		mech.
Fuel		Gasoline
Fuel comsump. aver. during operation	l/h	1,0

Exciter system

Frequency	Hz	90
Centrifugal force	kN	18
Amplitude	mm	1,10

Capacities

Fuel	l	4,0
Water	l	13,0

Technical modifications reserved. Machines may be shown with options.



PRE 834 16 010

300120 Sa01

BOMAG
Hellerwald
D-56154 Boppard
P.O. Box 5162
Tel. (0)6742 - 1000
Fax (0)6742 - 3090

