

TECHNICAL DATA

SINGLE DIRECTION VIBRATORY PLATES

BVP 10/36



Compact

Guide handle fully foldable



Robust and reliable

V-belt all around protected against damage




Safe transport

Transport handles (standard) and transport wheels (optional)

Shipping dimensions in m3

BVP 10/36

0,146

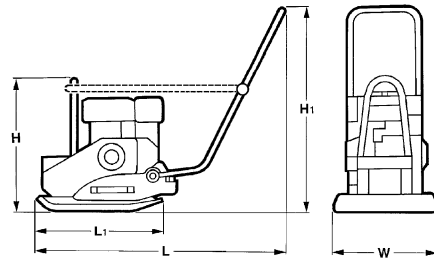

Standard Equipment

- Vibration insulated steering handle, foldable
- Detachable steering handle
- Highly wear resistant base plate
- Automatic shutdown at low oil level
- Recoil starter
- Single point lifting device
- Fully protected V-belt
- Carrying handles
- 3-2-1 Warranty

Optional Equipment

- Sprinkler system (+7kg)
- Transport wheels (+4kg)
- Plastic mat
- Tool kit
- Service Kit
- TOUGH WARRANTY
- Comfort guide handle
- Special painting
- Engine protection frame

Dimensions in mm

	H	H1	L	L1	W
BVP 10/36	535	915	1115	558	360

Technical Data

**BOMAG
BVP 10/36**

Weights

Operating weight CECE	kg	83
Basic weight	kg	82

Dimensions

Working width	mm	360
---------------------	----	-----

Driving Characteristics

Working speed, max.	m/min	25
Max. gradeability (dep. on soil con.)	%	30

Drive

Engine manufacturer	Honda
Type	GX 120
Emission stage	Stage V / CARB P.3
Cooling	air
Number of cylinders	1
Performance SAE J 1349	kW 2,6
Speed	min-1 3.600
Drive system	mech.
Fuel	Gasoline
Fuel consump. aver. during operation	l/h 0,9

Exciter system

Frequency	Hz	90
Centrifugal force	kN	10
Amplitude	mm	1,36

Capacities

Fuel	l	2,0
Water	l	7,0

Technical modifications reserved. Machines may be shown with options.



PRE 834 13 010

030423 Sa03

BOMAG
Hellerwald
D-56154 Boppard
P.O. Box 5162
Tel. (0)6742 - 1000
Fax (0)6742 - 3090

