

# PERFORMANCE DATA

PAVER (STAGE V)

BF 300 C-2




Greatest durability



Shorter set-up times



Exemplary efficiency

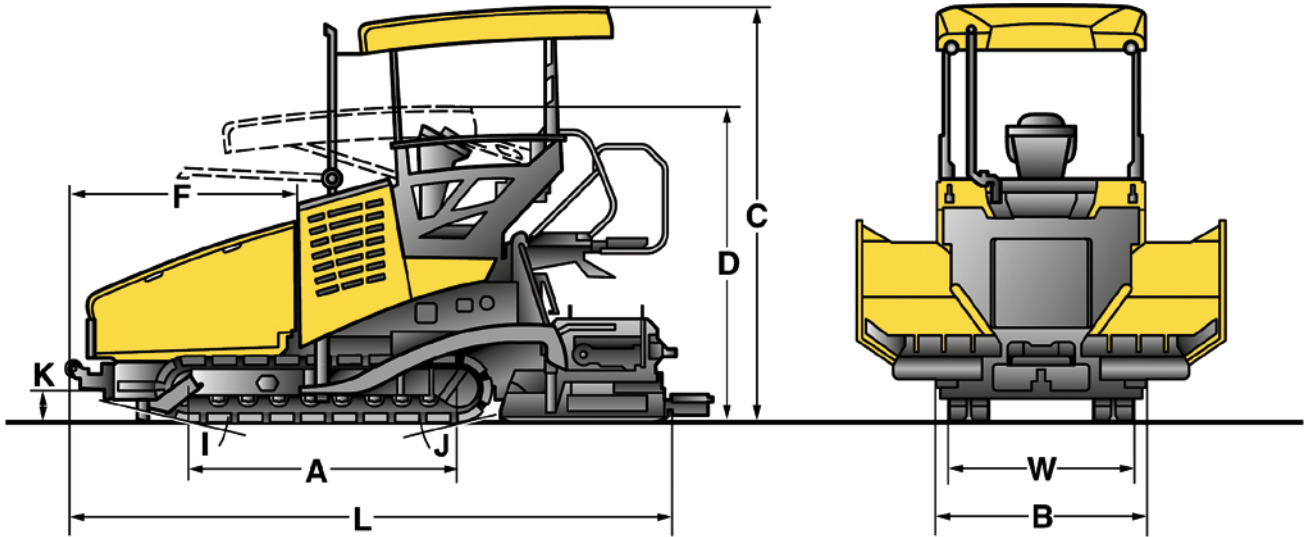

**Dimensions in mm**

	A	B	C	D	F	I	J	K	L	W
<b>BF 300 C-2 S 340-2</b>	2275	1880	3500	2690	1917	13°	16°	268	5050	1452



Hydraulic front gate – for a clean material flow.



Impact-free docking – dampened bumper.



Save up to 17 % fuel – demand-driven hydraulics – with BOMAG ECOMODE.



Heats up nearly 60 % quicker – unique MAGMALIFE heating system.

## Technical Data

## BOMAG BF 300 C-2

### Weight CECE

With S340-2 V screed / S340-2 TV screed ..... kg 10300 / 10400

### Dimensions

Transport length ..... mm 5050  
Transport width ..... mm 1880  
Transport height ..... mm 2690

### Travel characteristics

Travel speed ..... km/h 0-4,5  
Working speed ..... m/min<sup>-1</sup> 0-31 variable

### Drive

Engine manufacturer ..... Kubota  
Type ..... V3307-CR-T-ESB  
Emission stage ..... Stage V / TIER 4f  
Cooling ..... liquid  
Number of cylinders / Displacement ..... cm<sup>3</sup> 4 / 3331  
Rated power ..... kW / HP 54,6 / 72,8  
Rotary speed ..... m/min<sup>-1</sup> 2250

### Crawler assembly

Total length ..... mm 2275  
Width ..... mm 260

### Hopper

Capacity ..... m<sup>3</sup> 4,8  
Width (wings open) ..... mm 3080  
Width (wings closed) ..... mm 1730  
Length ..... mm 1760  
Filling height (middle) ..... mm 515

### Conveyor

Number ..... 2  
Rotary speed ..... m/min<sup>-1</sup> 37  
Individual control ..... Standard  
Reversing operation ..... yes

### Auger

Number ..... mm 2  
Auger diameter ..... mm 280  
Rotary speed ..... m/min<sup>-1</sup> 87  
Reversing operation ..... Standard

### Screed

Basic width retracted ..... mm 1700  
Basic width extended ..... mm 3400  
Min. width with reduction skids ..... mm 700  
Mat thickness ..... mm 250  
Screed plate depth ..... mm 330  
Screed plate thickness ..... mm 12  
Heating ..... electric  
Crown ..... % -2,5 ... +4,5  
Tamper frequency ..... Hz N.A. / 0-25  
Vibration frequency ..... Hz 0-60 / 0-60  
Basic weight ..... kg 1600 / 1800  
Max. working width ..... mm 5000

### Filling capacities

Fuel ..... l 93  
Hydraulic oil ..... l 74

Technical modifications reserved. Machines may be shown with options. The actual machine weight depends on the respective configuration.

## Standard Equipment

### Operator compartment

- SIDEVIEW
- Driver's seat: with swivel and side-shift
- Dashboard protection
- Hydraulic hinged roof
- Digital display for machine Management

### Tractor

- ECOMODE
- Separate control of hopper wings
- Hydraulic, height adjustable auger
- Track scraper
- 2 proportionally controlled and reversible wear-resistant cast augers; screw blades separately replaceable
- 2 independent and reversible scraper belts; high-wear resistant plates
- Rubber track pads
- LED roof working lights

### Screed

- L.C.S. Screed relief and traction increase system
- Screed temperature control
- MAGMALIFE Aluminium heating plates
- MAGMALIFE Automatic screed heating
- Mechanical screed lock
- Crown adjustment
- Side control of auger/scraper belts

### Other

- Tools
- 8 work lights
- Three phase Generator
- Socket 2 x 240 volt

## Optional Equipment

### Operator compartment

- Weather protection for platform
- Seat warmer
- Asphalt steam extraction

### Tractor

- Central lubrication system
- Optional paint finish
- Biologically degradable hydraulic oil
- Hydraulic hopper front flap
- Spring dampened push rollers

### Screed

- Hydraulic crown adjustment
- Heated side plates
- S 340-2 extensions:
  - 300 mm
  - 500 mm
- Reduction shoes

### Levelling systems

- Height and cross-slope sensing by means of ultrasonic or mechanical sensors

### Other

- Fleetmanagement BOMAG TELEMATIC
- Moon-light balloon
- Additional LED working lights



PRE 891 23 010

05052022 SA04

**BOMAG**  
Hellerwald  
D-56154 Boppard  
Postfach 5162  
D-56149 Boppard  
Tel. (0)6742 - 1000  
Fax (0)6742 - 3090

