


Model	Unit	CPCD50	CPCD60	CPCD70
Designation		XG550-DT2	XG560-DT2	XG570-DT2
Rated load	kg	5000	6000	7000
Load center distance	mm	600		
Lifting height	mm	3000		
Tilting angle of gantry (F/R)	°	6/12		
Max. driving speed	km/h	28		25
Gradability at full load	%	20		
Deadweight	kg	8100	8600	9100
Tread width (F/R)	mm	1470/1750		
Wheelbase	mm	2300		
Tire	Front wheel	4×8.25-15-14PR		
	Rear wheel	2×8.25-15-14PR		
Overall dimension (L×W× H)	mm	3660×2000×2500		
Fork (L× W× H)	mm	1200×150×60		1200×150×70
Lifting speed at full load	mm/s	400		
Minimum turning radius	mm	3500		
Minimum ground clearance	mm	195		
Engine	Model	Chaochai 6102BG-15		
	Rated power/speed	kw/r.p.m	81/2200	
	Maximum torque/speed	N.m/ r.p.m	353/1600-1800	

Internal combustion
counterbalance
Forklift Trucks

XG550-DT2
XG560-DT2
XG570-DT2

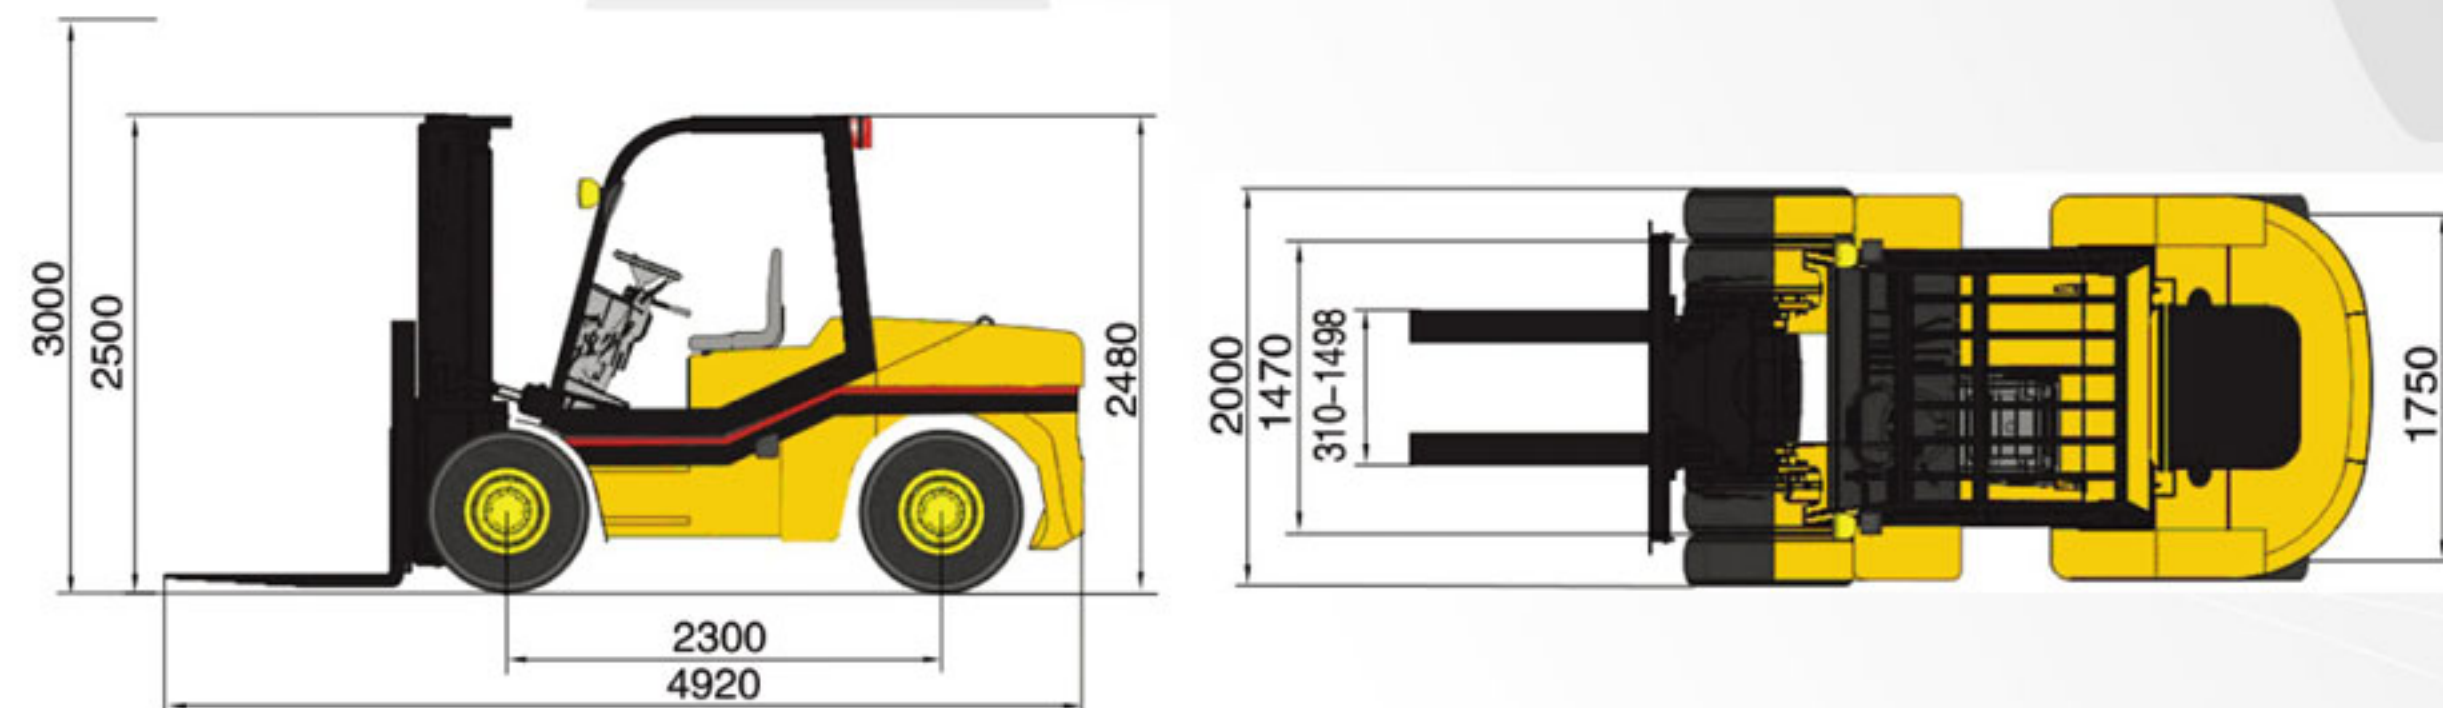

XIAMEN XGMA MACHINERY CO.,LTD.
XIAMEN XGMA INTERNATIONAL TRADE CO., LTD.

Add: 6th Floor,NO.11,East Hexiang Road, Xiamen,361004, China
Tel: 0086-592-5822737/5822384 Fax: 0086-592-5822378
<http://www.xgma.com.cn/> E-mail:marketing@xiagong.com

To be flexible and outstanding

Solid reliability, combined with supreme flexibility, present you the operability beyond your imagination.

Broad Vision

- >> Traditional gantry with broad vision for XGMA fork
- >> Spacious driving and operating space, with good vision



Energy-efficient

- >> Dual pump converging, steering optimized. Multi-way valve and gear pump are adopted
- >> Hydraulic oil radiator is equipped to improve continuous working time
- >> The hydraulic oil return filter is equipped to improve cleanness of hydraulic system
- >> With step-motor instrument, the electrical system can be controlled precisely



Stable and flexible maneuverability

- >> Suspended pedals can add more maneuvering space, full hydraulic brake system guarantees flexible braking performance and small braking force, the inching pedal is easy to near cargoes, and the parking brake force is 30% lower than original one
- >> For the adjustable steering gear and engaged gear structure, the front and back angle can be adjusted by needs



Whole-new comfortable experience

- >> The inclined balance weight can improve the visibility, guaranteeing good vision when backing distance needs to be determined
- >> The suspended integral overhead guard can reduce the travelling vibration
- >> Broad baseplate and spacious anti-slip footstep tilt oil cylinder falling can facilitate getting-on and getting-off.
- >> The water tank cover can be directly opened, which can facilitate maintenance.



Outstanding safety

- >> The Ackerman steering axle, with good rigidity, covers small area, it can lower the vehicle gravity center and improve the longitudinal stability
- >> The optimized speed-changing heat dissipation system and air duct can guarantee efficient heat-dissipation and energy-saving performance
- >> Equipped with internationally famous VARATA maintenance-free battery
- >> The centralized electrical parts and water joints can facilitate maintenance
- >> The enlarged hydraulic oil tank is equipped with clapboard, facilitating heat dissipation



Lifting speed



Mast tilt angle, forward and backward tilt



Driving speed



High-position intake system

With large capacity, the air filter can absorb clean air, reduce cylinder abrasion and improve engine service life



Optional Configurations

Multiple Engines can be optional



Attached Air Filter (Optional)

Streamlined Design

